

## Light-emitting diode module Prism P2 SE 0,72W


### TECHNICAL INFORMATION

|                           |               |
|---------------------------|---------------|
| LED type                  | 2835          |
| Input                     | 12V DC        |
| Color temperature         | 6500 K        |
| Beam angle                | 165°          |
| Protection level          | IP 67         |
| Center-to-center distance | 160 mm        |
| Working temperature       | -30°C + 50°C  |
| Available colors          | ●             |
| Power                     | <b>0,72 W</b> |
| Light output              | <b>81 lm</b>  |




FOR  
CHANNEL  
LETTERS

MODULE DESIGNED  
FOR CHANNEL LETTERS



DEPTH  
80-120  
MM

BEST FOR 80-120MM  
DEEP LIGHTBOXES



RECOMMENDED DEPTH:  
C-C DISTANCE RATIO



UP TO 110LM/W

HIGH EFFICIENCY  
LED INSIDE



IP 67

DUST AND WATER  
PROTECTED



81lm

HIGH BRIGHTNESS  
68 LM PER MODULE




6500 K

6500 K  
AND OTHER COLORS




5 YEAR EXTENDED  
WARRANTY


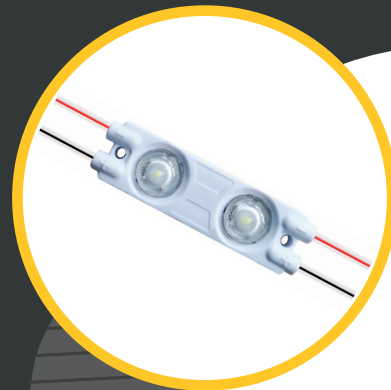


### LIGHT DISTRIBUTION GRAPH

Beam angle is 165°



### DIMENSIONS

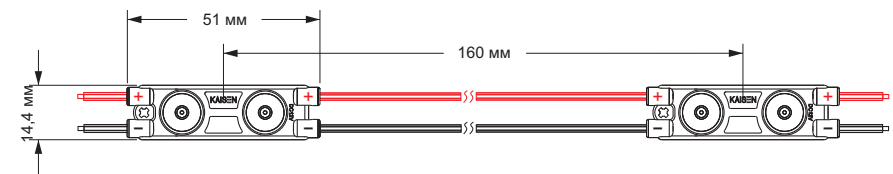

### CONNECTION



### PACKAGING

| Packing type | Chain   | Package | Box      |
|--------------|---------|---------|----------|
| Quantity     | 20 pcs  | 100 pcs | 2400 pcs |
| Weight       | 0,11 kg | 0,55 kg | 13,16 kg |